

NEW PRODUCT

Large-screen Panels for Any Occasion

Cutting-edge data processing and imaging technologies, attractive modern design and installation flexibility combine to provide reliable, highly functional displays for any venue



● Sleek Aluminum Bezel Framing

Aluminum is incorporated for the bezel framing, producing a stylish design that matches the interior and architecture of virtually any venue.

● Built-in Speakers (10W + 10W)

Each panel is equipped with two 10W speakers built into the display unit, providing audio without requiring the connection of external speakers.

● Enhanced Connectivity with DisplayPort


Application versatility is increased with the inclusion of a terminal enabling compatibility with next-generation standard DisplayPort. Transmission of images over a single cable up to 15 metres long is possible.

● RJ45 LAN Monitor Control

When connected to a LAN, monitors can be controlled and settings changed from a remote location, expanding installation possibilities.

● CAT5 Long Cable Capability (Option)

Optional CAT5 receiver and transmitter enable long cable connection of up to 150 metres without degrading picture quality.

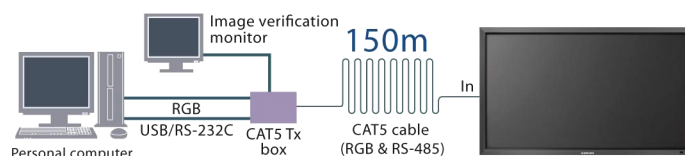
55" LCD Display
**LDT
55IV**
Resolution
**1920x1080
(Full HD)**
Colours
1.06 billion
Brightness
500cd/m²
Contrast Ratio
5000:1
Viewing Angle
**Up/Down 178°
Left/Right 178°**
Response Time
8ms (Grey to Grey)

Options

Stand: **ST-461V**

CAT5 Transmitter Box:

DP-2CA5-T

CAT5 Receiver Box:


DP-2CA5-R

55" LCD Display


LDT55IV




Dimensions

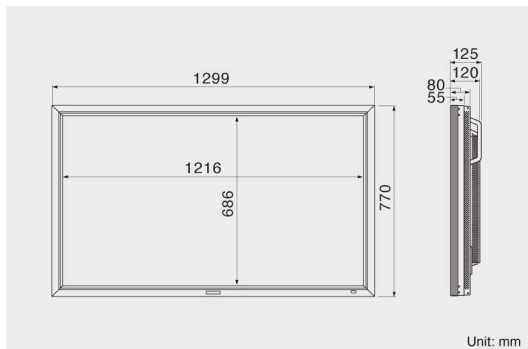

Connector Terminals



- 1 Power in (3-pin, with earth terminal)
- 2 USB hub
- 3 RGB 6 in (DisplayPort)
- 4 RGB 1 in (HDMI)
- 5 RGB 2 in (DVI-D)
- 6 RGB 3 in (mini D-sub 15-pin)
- 7 RGB out (mini D-sub 15-pin)
- 8 RGB 4 in DVD/HD in (BNC)
- 9 Video I/O (BNC/S, RCA connectors)
- 10 External speaker terminals
- 11 Audio out (RCA)
- 12 Audio in 1, 2, 3
- 13 RS-232C (D-sub 9-pin)
- 14 LAN connector
- 15 Option slot



Specifications

Orientation			Landscape/Portrait	
LCD module	Screen size (diagonal)		54.6" (1388mm)	
	Panel type		VA	
	Pixel pitch		0.630mm	
	Resolution		1920 × 1080 (Full HD)	
	Colour		Approx. 1.06 billion	
	Brightness (typ.)		500 cd/m ²	
	Contrast ratio		5000 : 1	
	Viewing angle (CR≥10)		Up/Down 178°, Left/Right 178°	
Response time		8ms (Grey to Grey)		
Viewing area			1209 x 680mm (47.6" x 26.8")	
Power management			VESA DPM	
Plug-n-Play			VESA DDC2B, DDC/CI	
Auto adjustment			Contrast, Position, Phase, Clock	
OSD user functions			Brightness, contrast, black level, zoom, PiP, Screen saver, Side border colour, Gamma selection, black level expansion, heat status, power-on delay, schedule, tiling, CAT-5 control, LAN control, closed caption, Programmable LUT, etc.	
Speaker/Audio output			External speaker jacks (7W + 7W) and internal speakers (10W + 10W typ.)	
Input/Output signal	PC Input/ Output	Input connector	(Analog)	Mini D-sub 15-pin, BNC (R, G, B, H, V) (PC/AV common)
			(Digital)	HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common), DisplayPort
		Output connector		Mini D-sub 15-pin
		CAT5 input		Modular 8-pin×1 providing RGB differential video and RS-485 control support. (Option)
		CAT5 output		Modular 8-pin×1 providing RGB differential video and RS-485 control support. (Option)
		Horizontal frequency		15.625/15.734, 31.5-91.1kHz
		Vertical frequency		50, 58-85Hz
		Video signal		Analog RGB, Digital: RGB
			Analog: separate (TTL), composite (TTL), Sync-on-Green, Digital: TMDS	
		Resolutions supported	640 × 480, 800 × 600, 1024 × 768, 1280 × 768, 1360 × 768, 1280 × 1024, 1600 × 1200, 1920 × 1080, 1920 × 1200 (1600 × 1200, 1920 × 1200 simplified compression)	
	AV Input/ Output	Input connector	(Analog)	Composite video <BNC, RCA>, S-terminal, BNC(Y/Pb/Pr/PC/AV common)
			(Digital)	HDMI (PC/AV common), DVI-D (with HDCP, PC/AV common)
		Output connector		Analog: composite video <BNC>
			Resolutions supported	Composite signal/S-terminal: NTSC, PAL, SECAM, 4.43 NTSC, PAL60 Component signal: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Audio Input/ Output	Input connector	(Analog)	RCA pin-jacks × 2 (L/R), stereo mini jack
			(Digital)	HDMI × 1
		Output connector		RCA pin jacks (L/R)
		Control Input/Output	Input connector	RS-232C <D-sub 9-pin>, LAN <modular 8-pin>
	Output connector	RS-232C <D-sub 9-pin>		
USB hub			Self-powered hub: 1 upstream/4 downstream/USB2.0 compliant	
Power Supply	Voltage, Current Consumption		AC100-240V, 50/60Hz 344W(322W w/o speakers)	
	Consumption in economy mode		Sleep mode: Less than 1W Power switch off: Less than 1W Main power switch off: 0W	
	Dimensions (W × H × D)		1299 × 770 × 125mm (51.1"×30.3"×4.9") 1474 × 938 × 346mm (58"×36.9"×13.6")	
Weight	Net		Approx. 39.9kg / 88.0lbs	
	Gross		Approx. 50.6kg / 111.6lbs	
Wall mounting interface			8 holes, M8 screws (200mm (7.9") pitch) for monitor, 4 holes x 2 sets, M4 screws (100mm (4.0") pitch) for SBC , Signage player mounted on monitor	
Regulation/Guideline compliance			UL60950-1/C-UL/CE Marking/BSMI/GOST-R/FCC-B/DOC-B/C-Tick/ RoHS/US Mercury/Energy Star/CCC only for Chinese model	
Accessories			Power cord, signal cable (mini D-sub 15-pin to mini D-sub 15-pin cable), User's Manual, remote control, batteries, clamps (for power cord and HDMI cable), etc.	

The display size stated in flyer copy is rounded off to a whole number. The actual size is listed in the Specifications chart.

MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com/>

■ All information contained herein may be changed without prior notice.
 ■ HDMI, HDMI and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.
 ■ Other brand, product, and service names are trademarks or registered trademarks of the respective companies.
 ■ Products in this flyer do not imply that Mitsubishi Electric Corporation intends to have them available in all countries where Mitsubishi Electric Corporation and its subsidiaries operate.
 ■ Photographs are simulated images.

Revised publication, effective XXX. 2011.
 Superseding publication X-X00-0-00000-X XXX. 2011
 Specifications are subject to change without notice.



Rue Ali Layachi ROUIBA-ALGER
 Tél: 023 85 52 10/023 85 50 80/ Fax: 023 85 52 73
 E-mail: contact@sadimet-dz.com
 Web: www.sadimet-dz.com